

RASKIN

INDUSTRIES

Formations AcoustX Alpine G-Core Preattached AcoustX Underlayment

FORMATIONS ACOUSTX ALPINE G-CORE

FORMATIONS ACOUSTX ALPINE G-CORE



- Superior Sound Reduction
- Reduced Labor & Installation Costs
- Attached AcoustX Underlayment
- Will Not Separate
- Ageing and Deterioration Resistant
- Shock Absorbing Comfort
- Waterproof Backing
- Anti-Bacterial Protection



RASKIN

INDUSTRIES




FAP 6015KR1 / 8015KR120
OAKESDALE



FAP 6012KR1 / 8012KR120
TOWN HALL



FAP 6004KR1 / 8004KR120
NATURAL

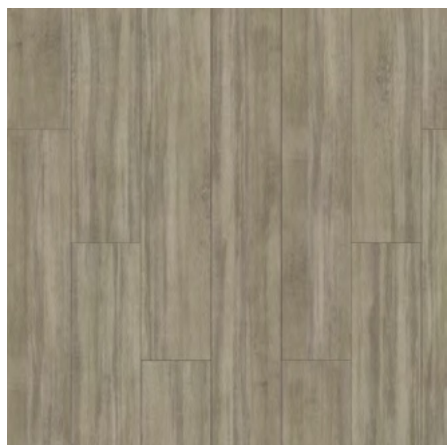

FAP 6008KR1 / 8008KR120
MODERN



FAP 6006KR1 / 8006KR120
SLATE



FAP 6007KR1 / 8007KR120
WHISPER



FAP 6002KR1 / 8002KR120
STORMY



FAP 6003KR1 / 8003KR120
SEASIDE



FAP 6000KR1 / 8000KR120
GRAVEL

FORMATIONS ACOUSTX ALPINE G-CORE COLLECTION

raskinind.com 1-855-3 RASKIN ©2025 Raskin Industries



- **Superior Sound Reduction** – Absorbs impact noise and minimizes sound transmission for a quieter environment. The uniform micro closed cell structure effectively reduces the energy exchange and transmission of the sound.
- **Reduced Labor & Installation Costs** – Eliminates the need for additional underlayment, simplifying installation and lowering expenses.
- **Attached AcoustX Underlayment Will Not Separate** – Engineered for durability, GCore underlayment remains securely bonded to the flooring and will not come apart over time.
- **Enhanced Durability** - Uniform micro closed cell structures maintain their form and function longer, providing consistent performance. Increases flooring longevity by preventing wear, tear, and deformation over time. Unlike cork, which can absorb water and degrade, cross-linked materials resist moisture penetration.
- **Shock Absorbing Comfort** – Provides extra cushioning, reducing strain on joints and enhancing underfoot comfort.
- **Waterproof Backing** – Backing is 100% waterproof.
- **Anti-Bacterial Protection** – Inhibits mold, mildew, and bacteria growth for a healthier indoor space.

PRODUCT SPECIFICATIONS

TECHNICAL DATA

Collection Name	AcoustX Alpine G-Core
Composition	Virgin Vinyl – Phthalate Free
Size (inches/mm)	7.28" x 48" (177.80 x 1219.20mm)
Gauge	4.0mm = 3.0mm + 1.0mm AcoustX Backing
Wear Layer	12mil (.3mm) and 20mil (.5mm)
Finish	G55 Advanced Ceramic Bead
Edge	Square
Pieces / Carton	12mil: 12 20mil: 12
Sq.Ft. / Carton	12mil: 29.13 20mil: 28
Cartons / Pallet	12mil: 60 20mil: 60
Limited Warranty	12mil: 20 Year Residential / 8 Year Commercial 20mil: 20 Year Residential / 10 Year Commercial
Country of Origin	China

TESTING

ASTM F1700 – Product Classification:	Class III, Type B, Embossed Surface Meets or exceeds standard
ASTM E648 – Radiant Panel (Critical Radiant Flux-Fire Rating Flaming Spread)	Meets or exceeds standard (Class 1)
ASTM D2047 James Machine – Coefficient of Friction (Slip Resistance)	Meets or exceeds standard for ADA and OSHA Guidelines (>.6)
ASTM F970 - Static Load Limit	Meets or exceeds standard
ASTM E492 – Impact Sound Insulation Acoustical Testing (IIC)	56 IIC – over 6" concrete (without drop ceiling)

SUSTAINABILITY

Recycled Content	No
ISO 9001 – Quality Management System	
ISO 14001 – Environmental Management System	
FloorScore® Certified:	Yes